



## KNIGHTRONIX™ DIRECT WIRE™ HIGH VOLTAGE PROBE ALIGNMENT FOR MANTLE BURNING GASLIGHT

The DIRECT WIRE™ high voltage probe has been pre-positioned. Before operating, be sure to check probe alignment and adjust as described below.

### Probe Alignment

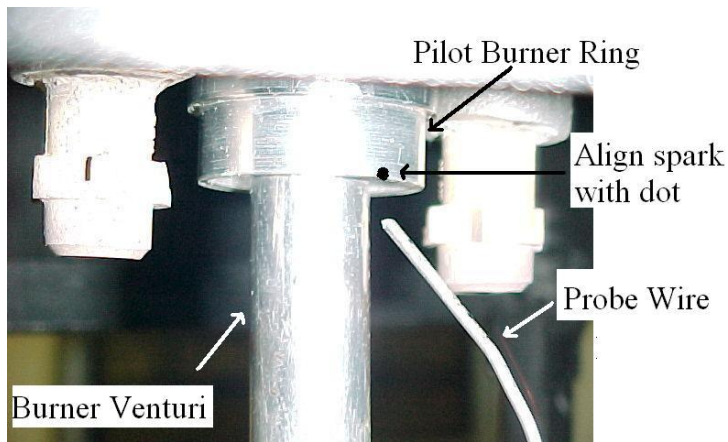

### Probe Gap



### Final Probe Alignment:

Verify that the high voltage igniter probe is firmly connected to the high voltage coil of the igniter board. The probe shall be aligned and positioned so that the spark shall project up from the open wire probe to the bottom edge of the pilot burner ring at the point that is marked with a black dot; the spark should not spark to the burner venturi. The gap shall be about 3/16 inch. (See photos above.)

For questions and technical support please call 651-636-1008.